

LEATHER PURSES & HAND BAGS




Production capacity/annum

30,000 Bags & 30,000 purses

Production process

Various components of the product are marked as per the pattern in leather and cut into components. The components are then skived. Then the adhesive is applied to the components and the lining is attached. The excess lining is trimmed and the articles are reversed inside cut, fittings are attached as the case may be. The colour is then applied followed by polishing and finishing. The products are stamped with brand names, inspected and packed for dispatch.

Process flow chart

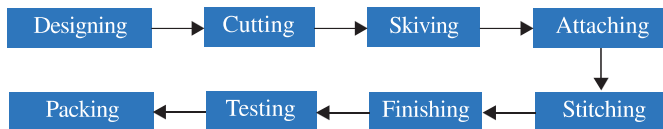

Machinery & equipment required

- Clicking machine
- Leather skiving machine
- Stamping machine
- Embossing machine
- Hand tools 1set Spares
- Flat bed industrial sewing machine

Raw material/consumables required

- Sheep Napa leather
- Lining leather
- Adhesives
- Decorative fittings
- Grey boards and other fittings

Utilities required

| | | |
|----------------------------------|---|---------------|
| Power required (load) | : | 20 K.W. |
| Water required (per shift basis) | : | Normal Supply |

Man power required

| | | |
|-------------------|---|--------|
| Supervisor | : | 1 No. |
| Machine operators | : | 3 Nos. |
| Skilled | : | 7 Nos. |
| Unskilled | : | 4 Nos. |

Area required

| | | |
|--------------|---|--------------|
| Total Area | : | 250 Sq. Mtr. |
| Covered Area | : | 200 Sq. Mtr. |

Investment required

| | | |
|--|---|--------------|
| Machinery & Equipment | : | } ₹ 15 Lakhs |
| Working Capital for 3 Months (Raw material, utilities & salary) | : | |

